



CATALOGUE


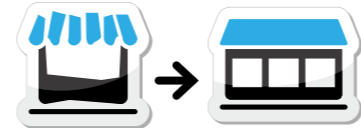





CONTENT

NEW! Complete systems for for chilled back fill	4
Glass doors for refrigerated wall multidecks	
NEW! safe tmax Highly-transparent insulating glass hinged doors	6
NEW! shelf/shelf DF Insulating sliding glass doors	8
safe Insulating glass hinged doors	10
safe ts Frameless single-glazed hinged doors	12
curve xl Designer insulating sliding glass door for low refrigerated multidecks	14
Glass covers for refrigerated and chest freezers	
ecoline t With left and right slide	16
ecoline push With front to back slide and divider bar	18
ecoline combi Combined cabinet with left and right slide	20
quick For plug-in freezers	22
Product comparison doors	24
Product comparison cabinets	26
We're here for you	27



REMIS – NOTICEABLY BETTER

	Pleasant shopping atmosphere		Global service network
	Product safety		International presence
	Short amortisation period		Project management
	Modern appearance		A pioneer and market leader
	Active climate protection		Decades of experience
	High standard of products		A wide range of products and furnishings
	Made-to-measure customisations		

COMPLETE SYSTEM FOR CHILLED BACK FILL

SAFE TMAX

NEW!

Complete system for cold storage rooms: Energy-saving glass doors and efficient product presentation all from a single source

Technical data glass doors

Frame height	1200 mm – 2000 mm
Module length	standard: 1250 mm, 1875 mm Additional grid lengths available
Panes	Insulating glass 22 mm (ESG-ESG)
Climate class	3M1 (25°C/60% relative humidity /-1°C to +5°C)
Colours	RAL 7004 frame and door profiles Additional designs available
Closure system	Self-closing
Lighting	T5 (cool white 840 or meat colour 76)
	LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)

Technical data product presentation system

Product shelf Dairy-Star	<ul style="list-style-type: none"> Faster access from both sides Stationary or wheel-mounted version Shelves are individually adjustable and are angled for gravity feed Easy to move and clean 	
	Sliding base Roller-Star	<ul style="list-style-type: none"> Products are always displayed neatly in the first row Dividers can be adjusted to suit product size Acrylic pane acts as merchandise support Metal rollers for extremely easy feeding



Optional:
LED lighting



GLASS DOORS FOR REFRIGERATED WALL MULTIDECKS

SAFE TMAX

NEW!



- maximum transparency
- energy-free door
- low Ug value

Technical data

Frame height	1200 mm – 2000 mm
Module length	standard: 1250 mm, 1875 mm Additional grid lengths available
Panes	Insulating glass 22 mm (ESG-ESG)
Climate class	3M1 (25°C/60% relative humidity /-1°C to +5°C)
Colours	RAL 7004 frame and door profiles Additional designs available
Closure system	Self-closing
Lighting	T5 (cool white 840 or meat colour 76) LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)



Optional:
LED lighting



*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

GLASS DOORS FOR REFRIGERATED WALL MULTIDECKS

SHELF DF / SHELF



NEW!

- ideal for narrow aisles
- dual functionality: comfortable for customers and staff

Technical data

Frame height 1200 mm – 2000 mm

Module length standard: 1250 mm, 1875 mm
Additional grid lengths available

Panes insulating glass 16 mm (ESG-ESG)

Climate class 3M1 (25°C/60% relative humidity /-1°C to +5°C)

Colours RAL 7004 frame and door profiles
Additional designs available

Closure system Self-closing, anti-bump system

Lighting T5 (cool white 840 or meat colour 76)
LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)



Optional:
LED lighting



*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

GLASS DOORS FOR REFRIGERATED WALL MULTIDECKS

SAFE



- robust
- energy-free door
- efficient

Technical data

Frame height 1200 mm – 2000 mm

Module length standard: 1250 mm, 1875 mm
Additional grid lengths available


Panes insulating glass 22 mm (ESG-ESG)

Climate class 3M1 (25°C/60% relative humidity /-1°C to +5°C)

Colours RAL 9005 frame
RAL 9006 door profile

Closure system Self-closing

Lighting T5 (cool white 840 or meat colour 76)
LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)

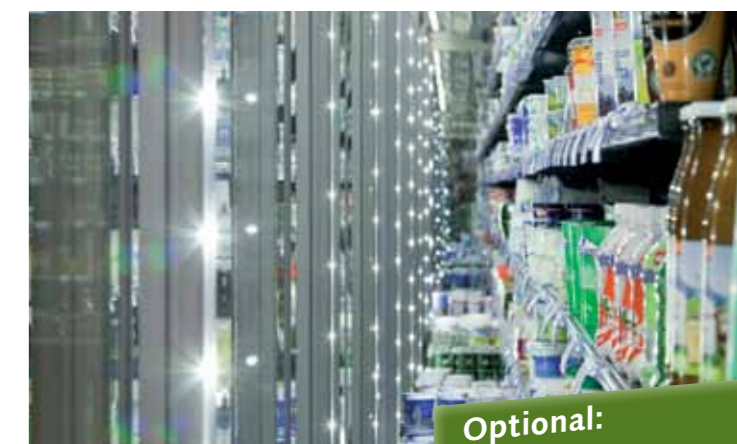

Optional:
LED lighting



*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

GLASS DOORS FOR REFRIGERATED WALL MULTIDECKS

SAFE TS



- good value
- versatile

Technical data

Frame height	1200 mm – 2000 mm
Module length	standard: 1250 mm, 1875 mm Additional grid lengths available

Panes insulating glass 6 mm (ESG)

Climate class not suitable for 3M1

Colours RAL 7004 frame and door profiles

Closure system Self-closing

Lighting
T5 (cool white 840 or meat colour 76)
LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)



Optional:
LED lighting

*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

GLASS DOORS FOR REFRIGERATED MULTIDECKS

CURVE XL



Design for half-height cabinets

Technical data

Frame height	80 mm at the bottom (incl. roller unit) 65 mm at the top (incl. roller unit)
Grid dimension	625 mm
Width	1250 mm – 3750 mm (Cap shelf available on request)
Door widths	635 mm/948 mm (standard)

Module framework Anodised aluminium, black PVC profile (RAL 7035), light grey PVC profile, aluminium running rails

Panes Insulating glass 16 mm (ESG-ESG)

Climate class 3M1 (25°C/60% relative humidity /-1°C to +5°C)

Closure system manual



*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

GLASS COVERS FOR DEEP FREEZERS

ECOLINE T



- ergonomic and long-lived
- Curved or straight

Technical data

Width ecoline t	1700 mm – 2300 mm
Width ecoline t 1100	900 mm – 1100 mm
Grid length	625 mm
Panes	4 mm (ESG)
Glass form	curved/flat (End cabinets flat only)
Climate class	3L1 (25° C/60 % relative humidity./-18° C)
Handrail profiles	Plastic one-piece profile or, as an alternative, aluminium profile 100 mm/65 mm (with/without lighting)

Scanner bar Triple, or optionally double

Colours

Scanner bar, handle base RAL 7040

Beading profile black

RAL 3020	RAL 5017	RAL 6018
RAL 7012	RAL 9005	

Lighting LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)



LED lighting in handrail and central bar



Optional: Bag-holder



*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

GLASS COVERS FOR DEEP FREEZERS

ECOLINE PUSH



- Extra-large opening
- economical
- easy to move

Technical data

Width ecoline push	1700 mm – 2300 mm
Width push 1500	1400 mm – 1600 mm
Grid length	1250 mm
Panes	4 mm (ESG)
Glass form	curved (End cabinets flat only)

Climate class 3L1 (25° C/60 % relative humidity./-18° C)

Handrail profiles Plastic one-piece profile or, as an alternative, aluminium profile
100 mm/65 mm (with/without lighting)

Scanner bar Triple, or optionally double

Colours

Scanner bar, handle base RAL 7040

Beading profile black

Handles RAL 3020 RAL 5017 RAL 6018
RAL 7012 RAL 9005

Lighting LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)



LED lighting in handrail and central bar



Optional: Bag-holder



*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

GLASS COVERS FOR DEEP FREEZERS

ECOLINE COMBI



Custom-made for a perfect appearance

Technical data

Width 300 mm – 450 mm
Length 1250 mm, 1875 mm, 2500 mm, 3750 mm

Panes 4 mm (ESG)
Glass form flat

Climate class 3L1 (25° C/60 % relative humidity./-18° C)

Handrail profiles Plastic one-piece profile or, as an alternative, aluminium profile
100 mm/65 mm (with/without lighting)

Colours

Scanner bar, handle base RAL 7040


Beading profile black

Handles

RAL 3020	RAL 5017	RAL 6018
RAL 7012	RAL 9005	

Lighting

LED (4000 K ≈ cool white 840 or cool meat ≈ meat colour 76)

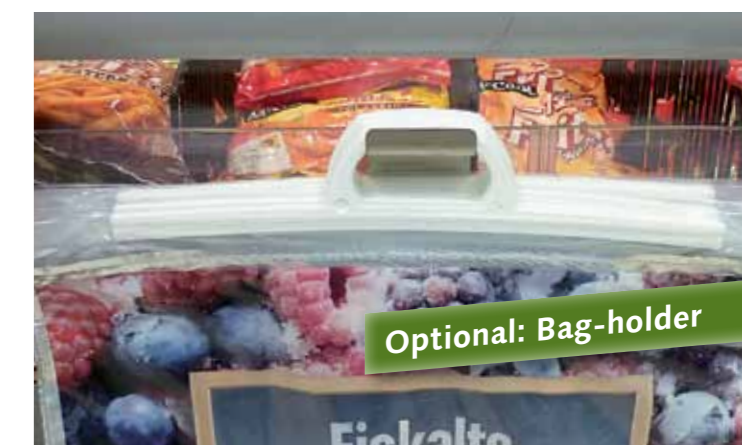

Optional: Bag-holder



LED lighting in handrail and central bar

GLASS COVERS FOR DEEP FREEZERS

QUICK



Retrofittable especially
for plug-in chest freezers

Technical data

Width 800 mm – 1100 mm
Length 1200 mm – 2500 mm

Panes 4 mm (ESG)
Glass form flat

Climate class 3L1 (25° C/60 % relative humidity./-18° C)

Frame The frames are located on the top of the chest and are adapted to its shape. Each frame contains two sliding doors.

Handles RAL 3020



*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

PRODUCT COMPARISON DOORS

Standard design glass doors						
	safe tmax	safe	safe ts	shelf	shelf DF	curve xl
Profile	Frame: RAL 7004 Pane surround: RAL 7004	Frame: RAL 9005 Pane surround: RAL 9006 (anodised)	Assembly profile anodised fastening profile RAL 7004	Rahmen und Scheibeneinfassung: RAL 7004	Frame and pane surround: RA L7004	Frame RAL 9005 Pane surround RAL 7035
Handles	Steel-look glue-on handles	full-length handle profile RAL 9006 (anodised)	RAL 7004 ring handle (grip hole), or alternatively affixed handles Steel effect	full-length handle profile		narrow handles RAL7035
Adaptation	plus assembly kit					-
Scanner strips	white					
Dimensions	Length based on 625 mm grid, height: 1100 - 2000 mm	Length based on 625 mm grid, height: 1300 - 2000 mm	Length based on 625 mm grid, height: 1000 - 2000 mm	Length based on 625 mm grid, height: 1400 - 2100 mm	Length based on 625 mm grid, height: 1400 - 2100 mm	Length based on 625 mm grid
Cabinet design	straight side wall, flush with cabinet leading edge (without bumper) flush to frame, inner lighting in head*					straight side wall flush with cabinet leading edge (without bumper) flush to frame
Lighting	vertical and horizontal T5/LED lighting		-	vertical and horizontal T5/LED lighting		-
Cabinet condition	perpendicular and level, without damage					perpendicular and level, without damage, with functional heating

*Additional styles and states available. These entail an extra charge.

Standard design glass doors

	safe tmax	safe	safe ts	shelf	shelf df	curve xl
Description	ESG pane with double insulating glazing and a low-e coating		ESG pane single insulating glazing and a low-e coating	ESG pane with double insulating glazing and a low-e coating		
Glass construction	22mm insulating glazing: 4 mm ESG 14 mm argon filling 4 mm ESG	22 mm insulating glazing: 4 mm ESG 14 mm argon filling 4 mm ESG	6 mm single glazing: 6 mm ESG	16 mm insulating glazing: 4 mm ESG 8 mm argon filling 4 mm ESG		16 mm insulating glazing: 4 mm ESG 8 mm argon filling 4 mm ESG
Thermal transmittance (EN 673)	1,2 W/m²K	1,2 W/m²K	3,7 W/m²K	1,7 W/m²K		1,7 W/m²K
Onset of condensation at 60% r. F. and room temperature of	+ 30,5° C**	+ 30,5° C**	+ 21,5° C**	+ 29,5° C**		+ 29,5° C**
Dew point	+ 21,6° C**	+ 21,6° C**	+ 14° C**	+ 20,5° C**		+ 20,5° C**
Emissivity	0,10		0,18	0,10		
Total internal reflection	13 %	13 %	11 %	13 %		13 %
Permeability to light	80 %	80 %	81 %	80 %		80 %
Energy savings	50% - 77%*	50% - 77%*	30% - 45%*	50% - 72%*		45% - 50%*

*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

PRODUCT COMPARISON CABINETS

Standard design glass covers

	ecoline t flat	ecoline t curved	ecoline push	ecoline push 1500	ecoline t 1100	ecoline combi	quick
Profile	RAL 7040						RAL 7035
Handles	RAL 7012 (grey)						red recessed handle
Beading profile	RAL 9005 (black)						–
Scannerstrips	white, 40 mm			–	–	white	–
Scanner bar	Triple, plastic Optional: double, plastic			–	–	–	–
Dimensions	Length based on 625 mm grid	Length based on 625 mm grid, Width from 1,910 mm	Length based on 625 mm grid	Length based on 625 mm grid; Width: 1400 - 1600 mm	Length based on 625 mm grid; Width: 900 - 1100 mm	Length based on 625 mm grid	all dimensions possible, 2 pane solution up to 2 m in length, thereafter 4 pane solution
Cabinet design	Glazed all round, standard distance for back-to-back arrangement, end cabinet attached directly to island, handrail at the same height as divider bar			glazed all round, end cabinet attached directly to island, Handrail at the same height as divider bar		glazed all round	glazed all round/ unglazed
Lighting	LED: internal handrail lighting (lengthways) and internal on centrebar T5: external handrail lighting, lengthways and crossways						–
Cabinet condition	perpendicular and level, without damage, with functional heating						perpendicular and level, without damage, with functional heating
Energy savings	40% - 50%*		40% - 50%*	40% - 50%*	40% - 50%*	20% - 30%*	40% - 50%*

*In accordance with DIN EN 23953, dependent on the refrigeration unit, cooling system, opening frequency, etc.

WE'RE HERE FOR YOU

Tailor-made for you

REMIglas – individually designed glass covers for your refrigerated multidecks, deep freezers and chest freezers. They are tailor-made to blend perfectly into your display cabinets.

Our knowledge for your business

REMIS' expertise is based on its 40 years of experience and individual customisation. In our database of over 1,000 refrigerated display cabinets we're bound to find yours.

Getting to your goal

At REMIS you will get a complete package for the retrofitting of your refrigeration cabinets: Our comprehensive service ranges from stock-taking right through to assembly and spare parts management. An extensive database guarantees form-fitted manufacture for your cabinets. Your REMIS contact person on the ground will advise you in detail on energy efficiency, lighting, design possibilities, appearance and amortisation.

The energy efficient retrofitting work carried out by the experienced REMIS service employees will be a perfect fit. We will work closely with your refrigeration engineers to optimise the cooling effect of your refrigeration system with its new REMIglas covers.

Noticeably better for your success



2014

REMIS GmbH

Mathias-Brüggen-Str. 67–69
D-50829 Cologne, Germany

www.remiglas.de · remis@remis.de

