



# LOCKS 55-55HP and 57-57HP



## Locks for manual sliding doors



Open lock



Closed lock



### Locks 55-55HP

For sliding doors with 20mm gasket thickness:

- Fermatic 2120

### Locks 57-57HP

For sliding doors with 35mm gasket thickness:


- Fermatic 2130, 2150, 2320, 2420, 3530, 4440, 7530, 8530, 8730

- 2 versions:**
- Standard
  - HP (High Performance)

Internal unlocking by lever

### OPTIONS

- Organization chart
- Master key



Internal release 47 STD



Internal release 47 HP








# LOCKS WITH CONTACT 56-56HP and 58-58HP




## Locks for automatic sliding doors

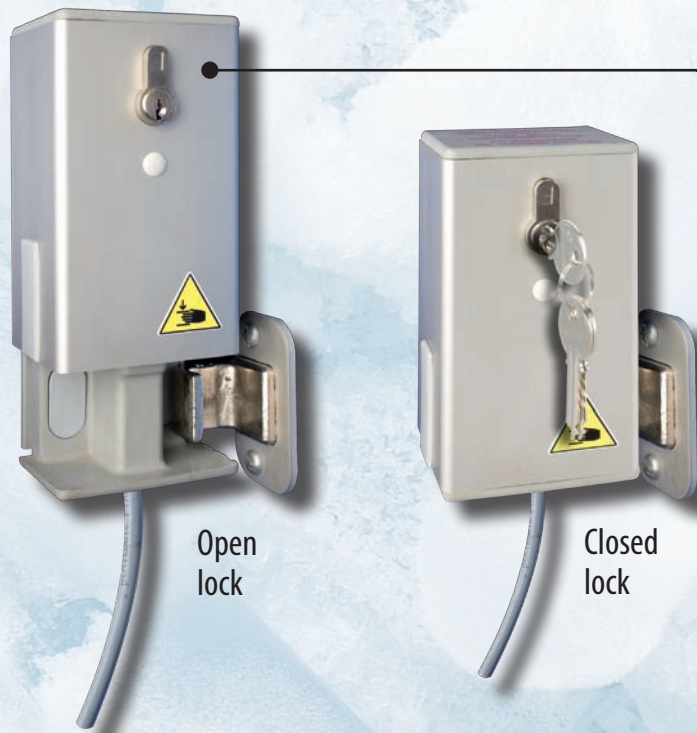

Open lock

Closed lock

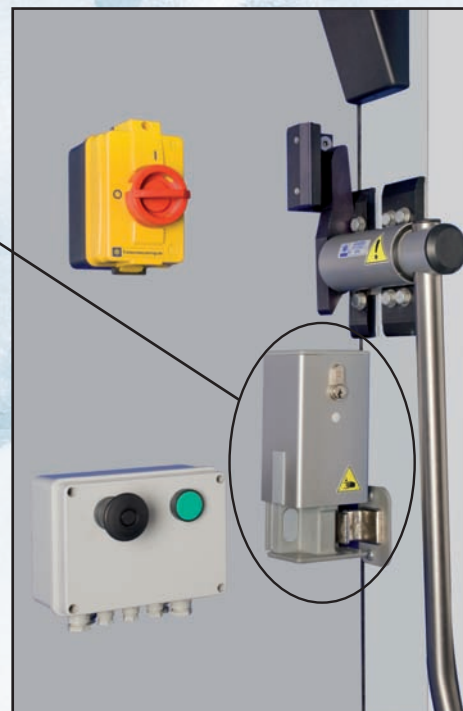

Locks with cut contact

### Locks 56-56HP

For automatic sliding doors with 20mm gasket thickness:

- Systems 2180, 2190

### Locks 58-58HP

For automatic sliding doors with 35mm gasket thickness:


- Systems 2180/120, 2190/120, 2380, 2390, 2480, 2490, 3580, 7580, 7590, 8790

**2 versions:** - Standard  
- HP (High Performance)

Internal unlocking by lever

**OPTIONS**

- Organization chart
- Master key



Internal release 47 STD



Internal release 47 HP



# FERMOD®



75, rue de Richelieu - 75002 PARIS - FRANCE  
Tél. : 33 (0)1 42 96 94 06 - Fax : 33 (0)1 42 86 84 51  
<http://www.fermod.com> • e-mail: [contact@fermod.com](mailto:contact@fermod.com)

Siège Social : Senlis (Oise) - Société Anonyme au Capital de 1 004 400 €  
RCS Compiègne B 301 468 211 - Siret 301 468 211 00018 - APE 2572 Z

DISTRIBUTOR

Impremière Polygraphiques - Beauvais - Edition du 18/12/2015